PROFESSIONAL DESIGN

STANDARDIZED PRODUCTION

INTELLIGENT MANAGEMENT

QUALITY SERVICE

JIANGSU MINGXING WATER SUPPLY EQUIPMENT CO.,LTD

Factory Address:

No. 1, Mingxing North Road, Tech Innovation Park, Jianhu County, Yancheng, Jiangsu, China (Mainland)

National free service hotline: 400- 6767- 228 **Website:** www.mxtank.com

Hotline: +86 0515 80663333 **After sales hotline:** +86 0515 80685356

Telephone: +8615365682888 **Postal Code:** 224700 **E-MAIL:** mingxing- watersupply@mxgs.cn

MXGS

MINGXING
WATER SUPPLY

EXPERTS IN WATER SUPPLY SOLUTIONS

TAKING CORPORATE CULTURE AND PRODUCTS AS
THE CONTENT OF COMMUNICATION IS THE MOST DIRECT

JIANGSU MINGXING WATER SUPPLY EQUIPMENT CO.,LTD

WITH SCIENTIFIC MANAGEMENT, SUPERB TECHNOLOGY,
RELIABLE QUALITY AND EXCELLENT COMMUNITY SERVICE,
SET AN EXAMPLE FOR THE WATER SUPPLY INDUSTRY
BY OUR BIGGEST CONTRIBUTION AND MAKE BETTER CITY.

About us

With over 15 years experience in stainless steel water tank and water supply equipment, MingXing launch as specialized company in stainless steel water tank field for China domestic market.

After successful domestic market entering, from 2008, we started to export water tank to Africa and middle- east area and now our market share is getting expand and we believe that shows our products quality. Many customers like & satisfy our goods quality.

Our business minds is trust, credit, quick response and delivery, best quality class for our customer's business. We believe that developing & controlling our goods quality leads our customer's success in their business. Also our customer will cover big market share by our support.

We create customized solutions for customers' specific needs and are able to get involved at any stage of the project life cycle.

We has successfully realized more than 1000 projects in 16 years of work for government and local private companies from more than 10 countries.

We provide individual solutions for each project and ensure the approval of engineering documentation by the authority.

Production features:

◎ Advanced technologies
◎ Professional staff
◎ Quality control at all stages from selection of material to assembly
◎ Health and safety engineering
◎ Environmental protection

MingXing water tanks are available in various size with a capacity from 10 to 30000m³ for liquids, in order to suit a variety of industrial uses:

◎ Firefighting water storage
◎ Waste water
◎ Potable water
◎ Industrial needs, such as hospital ,school and plant
◎ Agricultural purposes
◎ Some non corrosive chemicals

Our company is capable of producing a full range of custom design storage tanks, including stainless steel tank, galvanized tank,bolt water tank and weld water tank,elevated water tank,underground water tank.

We can meet customers' requirements and supply storage tank with variety of accessories: stairways, railings,manhole, thermal insulation made of polyurethane, corrosion protection.

>>Integrity as the foundation >>Righteousness as the Path >>Excelence as the Legacy

Development of Enterprise

2006

The stainless steel water tank of Yancheng Mingxing water supply equipment Co., Ltd. passed the inspection of Jiangsu Center for Disease Control and prevention, and obtained the quality inspection report

2008

The first batch of water tanks were exported to Brisbane, Australia

2013

The company officially established the R & D department and developed intelligent equipment with remote control function, such as non negative pressure variable frequency water supply, buried water tank, fire constant pressure water supply, etc

2014

In March, Yancheng Mingxing water supply equipment Co., Ltd. was officially renamed Jiangsu Mingxing water supply equipment Co., Ltd., with a registered capital of 70.18 million yuan

2014

In April, a tank pump integrated floating free pump station won the national utility model patent

2015

Obtained the registration certificate of customs declaration unit in August

2016

In November, the company was rated as a national high-tech enterprise

2020

The company has successfully developed a smart cloud platform by using new generation information technologies such as the Internet of things, cloud computing, mobile Internet and big data.

New vision, New future

Highly decided to field of vision, the Angle change idea, scale grasp the future.

Our Team

Pursue persistently and surpass constantly with the spirit of craftsman

Persistent pursuit, and constantly go beyond, to shape employee for technology "craftsmen" and ownership of the company.

We are a professional team

Our members have many years of technical background in the water supply and drainage industry, and have been striving for excellence.

We are a young team

We are a young team, full of vitality and innovative spirit.

We are a dedicated team

We firmly believe that the creation of brand comes from the recognition of customers. Only by focusing can we be professional.

We are a team with dreams

We come from all over the world because of a common dream: to be a truly excellent water supply equipment manufacturer and provide customers with the best quality water supply equipment products.

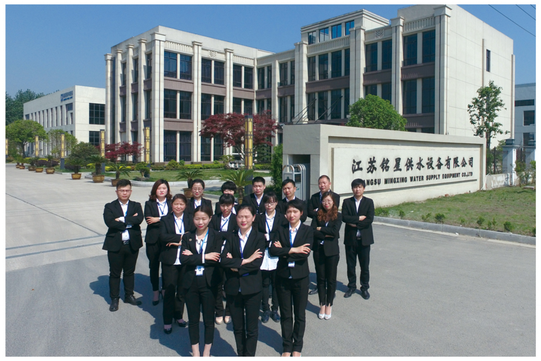

RESPONSIBLE TEAM

REGULAR MEETINGS

INTERNATIONAL MARKETING DEPARTMENT

WORKSHOP MECHANIZED PRODUCTION

UNIQUE BECAUSE OF SPECIALTY

FULLY AUTOMATIC MECHANIZED WELDING

Certificates Honor

Mingxing pays attention to management innovation and has passed the three system certification of quality, environment and occupational health and safety. It has 3C compulsory certification certificate for electrical cabinets, safety production standardization certificate, China national compulsory product certification certificate, environmental protection product certification certificate, high-tech enterprise certificate, etc. issued by the fire product conformity assessment center of the Ministry of public security.

证书号第3387809号

发明专利证书

发明名称：一种箱泵一体化无浮泵站

发明人：丁正军;王林泉

专利号：ZL 2014 1 0207865.5

专利申请日：2014年05月17日

专利权人：江苏铭星供水设备有限公司

地址：224700 江苏省盐城市建湖县科技创业园铭星北路1号

授权公告日：2019年05月24日　授权公告号：CN 105089105 B

国家知识产权局依照中华人民共和国专利法进行审查，决定授予专利权，颁发发明专利证书并在专利登记簿上予以登记。专利权自授权公告之日起生效。专利权期限为二十年，自申请日起算。

专利法和记载于专利登记簿的法律状况，专利权的转移、质押、无效、终止、恢复和专利权人的姓名或名称、国籍、地址变更等事项记载在专利登记簿上。

局长 申长雨

第1页（共2页）

其他事项参见背面

证书号第2552135号

发明专利证书

发明名称：水箱强度试验装置

发明人：王林泉

专利号：ZL 2016 1 0919221.8

专利申请日：2016年10月21日

专利权人：江苏铭星供水设备有限公司

授权公告日：2017年07月14日

本发明经过名称依照中华人民共和国专利法进行审查，决定授予专利权，颁发本证书并在专利登记簿上予以登记。专利权自授权公告之日起生效。

本专利的专利权期限为二十年，自申请日起算。专利权人应当按照专利法及其实施细则规定缴纳年费，本专利的年费应当在每年10月21日前缴纳，未按照规定缴纳年费的，专利权自应当缴纳年费期满之日起终止。

专利法和记载于专利登记簿的法律状况，专利权的转移、质押、无效、终止、恢复和专利权人的姓名或名称、国籍、地址变更等事项记载在专利登记簿上。

局长 申长雨

第1页（共1页）

证书号第2992354号

发明专利证书

发明名称：一种全变频箱泵一体化供水设备

发明人：丁正军

专利号：ZL 2016 1 0428744.9

专利申请日：2016年06月16日

专利权人：江苏铭星供水设备有限公司

地址：224700 江苏省盐城市建湖县科技创业园铭星北路1号，江苏铭星供水设备有限公司

授权公告日：2018年07月06日　授权公告号：CN 105908806 B

本发明经过名称依照中华人民共和国专利法进行审查，决定授予专利权，颁发本证书并在专利登记簿上予以登记。专利权自授权公告之日起生效。

本专利的专利权期限为二十年，自申请日起算。专利权人应当按照专利法及其实施细则规定缴纳年费，本专利的年费应当在每年06月16日前缴纳，未按照规定缴纳年费的，专利权自应当缴纳年费期满之日起终止。

专利法和记载于专利登记簿的法律状况，专利权的转移、质押、无效、终止、恢复和专利权人的姓名或名称、国籍、地址变更等事项记载在专利登记簿上。

局长 申长雨

第1页（共1页）

NGV

The Authentication Certificate of Environmental Management System

Jiangsu Mingxing Water-supply Installation Co., Ltd.

Registered/Production/Business/Office Address: No. 1, Mingxing North Road, Science & Technology Innovation Park, Jianhu County, Yancheng City, Jiangsu Province, P.R. China

Is in conformity with GB/T24001-2016/ISO14001:2015 standard requirements

The certificate is valid for the following scope:

Stainless steel water tank, living intelligent water supply and drainage equipment, fire water supply and drainage equipment manufacturing and after-sales service (within the scope of the permit) related environmental management activities

Registration No. of Certificate: 05320E500408R2M
Date of the Awarded Certificate: 01-04-2020
Term of the Certificate's Validity: 01-04-2020-31-03-2023
Date of the First Authorization: 26-05-2014
Enterprise Organization Code: 91320925786341917

This certificate is the provision of the state's administrative license, qualification within the scope of used together shall be valid. The certificate information can be in the Certification and Accreditation Administration of the People's Republic of China web site inquiries (www.cnca.gov.cn). If not stick the laser anti-counterfeit mark after the date of surveillance expires, this certificate is invalid. This Certificate is issued in both Chinese and English. In the event of any discrepancy between the two versions, the Chinese version shall prevail.

The first surveillance | Mark stick here | The second surveillance | Mark stick here

General Manager: Yuanlong

Registered Address of Certification Authority: 2-77, 10th Floor, Building 2, No. 8 North Chaoyangmen Street, Dongcheng District, Beijing.
Mailing Address of Certification Authority: Room 10A, Building B, Fuhua Building, No.8 North Chaoyangmen Street, Dongcheng District, Beijing.
Tel: 010-58981200 FC: 100738 Http://www.ngv-cqc.cn

NGV

The Authentication Certificate of Occupational Health and Safety Management System

Jiangsu Mingxing Water-supply Installation Co., Ltd.

Registered/Production/Business/Office Address: No. 1, Mingxing North Road, Science & Technology Innovation Park, Jianhu County, Yancheng City, Jiangsu Province, P.R. China

Is in conformity with ISO45001:2018 standard requirements

The certificate is valid for the following scope:

Stainless steel water tank, living intelligent water supply and drainage equipment, fire water supply and drainage equipment manufacturing and after-sales service (within the scope of the permit) related occupational health and safety management activities

Registration No. of Certificate: 05320S500508R2M
Date of the Awarded Certificate: 01-04-2020
Term of the Certificate's Validity: 01-04-2020-31-03-2023
Date of the First Authorization: 26-05-2014
Enterprise Organization Code: 91320925786341917

This certificate is the provision of the state's administrative license, qualification within the scope of used together shall be valid. The certificate information can be in the Certification and Accreditation Administration of the People's Republic of China web site inquiries (www.cnca.gov.cn). If not stick the laser anti-counterfeit mark after the date of surveillance expires, this certificate is invalid. This Certificate is issued in both Chinese and English. In the event of any discrepancy between the two versions, the Chinese version shall prevail.

The first surveillance | Mark stick here | The second surveillance | Mark stick here

General Manager: Yuanlong

Registered Address of Certification Authority: 2-77, 10th Floor, Building 2, No. 8 North Chaoyangmen Street, Dongcheng District, Beijing.
Mailing Address of Certification Authority: Room 10A, Building B, Fuhua Building, No.8 North Chaoyangmen Street, Dongcheng District, Beijing.
Tel: 010-58981200 FC: 100738 Http://www.ngv-cqc.cn

NGV

The Authentication Certificate of Quality Management System

Jiangsu Mingxing Water-supply Installation Co., Ltd.

Registered/Production/Business/Office Address: No. 1, Mingxing North Road, Science & Technology Innovation Park, Jianhu County, Yancheng City, Jiangsu Province, P.R. China

Is in conformity with GB/T19001-2016/ISO9001:2015 standard requirements

The certificate is valid for the following scope:

Manufacture and after-sales service of stainless steel water tanks, living intelligent water supply and drainage equipment and fire fighting water supply and drainage equipment (within the scope of license)

Registration No. of Certificate: 05320Q500708R2M
Date of the Awarded Certificate: 01-04-2020
Term of the Certificate's Validity: 01-04-2020-31-03-2023
Date of the First Authorization: 08-05-2006
Enterprise Organization Code: 91320925786341917

This certificate is the provision of the state's administrative license, qualification within the scope of used together shall be valid. If not stick the laser anti-counterfeit mark after the date of surveillance expires, this certificate is invalid. This Certificate is issued in both Chinese and English. In the event of any discrepancy between the two versions, the Chinese version shall prevail.

The first surveillance | Mark stick here | The second surveillance | Mark stick here

General Manager: Yuanlong

This certificate information can be found on the official website (www.cnca.gov.cn).
Mailing Address of Certification Authority: Room 10A, Building F, Fuhua Building, No.8 North Chaoyangmen Street, Dongcheng District, Beijing.
Tel: 010-58981200 FC: 100738 Http://www.ngv-cqc.cn

Certificate of Compliance

Certificate Number : ETG1511101002

Applicant : JIANGSU MINGXING WATER SUPPLY EQUIPMENT CO., LTD.
No.1, Mingxing North Road, Technology Park, Jianhu County, Yancheng City, Jiangsu Province, China

Manufacturer : JIANGSU MINGXING WATER SUPPLY EQUIPMENT CO., LTD.
No.1, Mingxing North Road, Technology Park, Jianhu County, Yancheng City, Jiangsu Province, China

Product : WATER TANK

M/N : MX 1-1000/T

Verification to : 2001/95/EC General Product Safty

Remark: The product(s) has been verified on a voluntary basis. The product(s) satisfies the requirements of the Certification Mark of ETC, in reference to the above listed Standard(s). The above Certification Mark can be affixed on the product(s) according to the ETC regulation about Its release and Its use.
Whereas the Manufacturer is responsible of the CE certification of the product(s) and not exempted to perform all the necessary activities before placing the product(s) on the market. The Manufacturer is also responsible to maintain efficient the internal production control to ensure the product(s) are in compliance with the Certification ETC Mark.

Europe Testing Certification Co., Limited
Address:Suite 404,324 Regent Street,London United Kingdom W1B 3HH.
Tel:+44 2031 295 749
http://www.etcuk.co.uk, E-mail:etc@etcuk.co.uk

Manager
Nov. 10, 2015

统一社会信用代码 91320925786341917 (1/3)

营业执照

（副本）

编号 320925000201908230086

名称 江苏铭星供水设备有限公司

类型 有限责任公司

法定代表人 丁巧珍

经营范围 生活给排水设备、消防给排水设备、水处理设备、不锈钢水箱、泵、给水设备、一体化箱泵、一体化消防箱泵成套设备、安装、销售、机电设备安装工程施工（凭资质证书经营）。消防设备销售、销售、机械设备专业图纸设计。（依法须经批准的项目，经相关部门批准后方开展经营活动）。（以上涉及国家专项规定的，按国家规定执行）

注册资本 700万元整

成立日期 2006年04月19日

营业期限 2006年04月19日至2026年04月18日

住所 建湖县科技创业园铭星北路1号

登记机关 建湖县市场监督管理局 2019 06 月 27 日

国家企业信用信息公示系统网址：http://www.gsxt.gov.cn

市场主体应当于每年1月1日至6月30日通过国家企业信用信息公示系统报送公示年度报告。

国家市场监督管理总局监制

YEARNING,
COMPOSE THE CHINA POST

Sales Network

The market is the sea, the enterprise is the ship,
The quality is the sail, the man is the helmsman.

Sales is the lifeblood of a company. Our company's sales model integrates online and offline sales, and establishes an e-commerce department, mainly for online sales on the national Internet; Exports to America, Africa, Asia, Europe, the Middle East and other countries; And our company has set up a special promotion department, which is mainly responsible for brand building and product promotion, so as to improve our company's recognition.

- Uganda
- Pakistan
- Malaysia
- America
- Thailand

• • •

Product introduction

Quality products are the guarantee of market competition

- MINGXING PUMP
- DOUBLE-SIDE ARC RIB BOLTED WATER TANK
- SW WATER TANK (BOLTED WATER TANK)
- STAINLESS STEEL WELDED WATER TANK
- ELEVATED WATER TANK WITH STEEL TOWER
- THERMAL INSULATION WATER TANK
- FIRE PRESSURE STABILIZING EQUIPMENT
- INTELLIGENT FIRE WATER SUPPLY UNIT
- DIGITAL FULL FREQUENCY CONVERSION STABILIZED PRESSURE TANK TYPE WITHOUT NEGATIVE PRESSURE
- DIGITAL FULL FREQUENCY CONVERSION WITH WATER QUALITY IMPROVEMENT FUNCTION
- ABOVEGROUND INTELLIGENT INTEGRATED PUMP STATION
- BURIED INTELLIGENT INTEGRATED PUMP STATION

MINGXING
WATER SUPPLY

PASSED THE NATIONAL HIGH-TECH ENTERPRISE CERTIFICATION

MingXing Pump

Characteristics of domestic pump products

· MS, MC is a high- efficiency and energy- saving vertical multi-stage centrifugal pump. The centrifugal force generated by the impeller of the rotary pump drives the fluid to rotate to complete the transmission of liquid. It is mainly composed of the pump body and motor connection composed of the main shaft, impeller, guide vane, pump shell and mechanical seal.

· As booster pumps, MS and MC series can be used alone or matched with booster equipment in building and industrial booster systems. Its pipeline structure can ensure that the pump is directly installed in a horizontal pipeline system with the same inlet and outlet horizontal lines and the same pipe diameter. This design makes the structure and pipeline of the pump more compact.

· MS and MC series vertical multistage centrifugal pumps can be installed vertically or horizontally on the pipeline according to the different installation space on site. In the case of horizontal installation, the water pump needs to add a fixed module to ensure the stability of the pump during operation.

Characteristics of fire pump products

· Pump body motor direct connection, compact structure; The pump body is equipped with reinforcing ribs, which has a beautiful appearance.

· Using CFD hydraulic model optimization design, through the model optimization design and pump dynamic characteristic analysis method, the pump efficiency is maximized and the pump efficient operation range is widened. The casting adopts resin sand molding, and the mold of the flow passage part adopts numerical control molding, which ensures the dimensional accuracy and surface smoothness of the part.

· The main structural parts of the product are optimized by FEM, which meets the structural design rationality and load resistance requirements of the parts.

· The high- efficiency three- phase asynchronous motor is selected, and the efficiency index meets the energy efficiency standard insulation grade F of the national standard GB 18163 'limited values and energy efficiency grades of small and medium- sized three- phase asynchronous motors'.

Focus on customer service with 'Integrity, Righteousness, Excellence'

Connection mode of domestic pump

· Flange connection · Threaded connection
· Clamp connection · Elliptical flange connection

Material of domestic pump

· Cast iron · Stainless steel (AISI304, AISI316)
· Duplex stainless steel (2205)

Living motor

· Squirrel cage totally enclosed air-cooled IEC motor, suitable for continuous working system operation
· Protection grade: IP55
· Insulation class: F
· Standard voltage: 3x220-240/380-415V
1x220-240V
· Single phase motors are available from 0.37kW-2.2kW.

Liquid temperature of domestic pump

· Normal temperature pump: liquid temperature -15℃ to+70℃.
· Hot water pump: liquid temperature -15℃ to +105℃.

Performance curve of domestic pump

· All curves are based on the measured value of the motor at constant speed of 2900rpm or 2950rpm.
· The curve tolerance complies with ISO9906.
· The test adopts water without air at 20℃ and the kinematic viscosity is 1mm²/s.
· The use of the pump refers to the performance range of the thick line to prevent overheating caused by too small flow or overload of the motor caused by too much flow.

Operating conditions of domestic pump

· Thin, clean, non flammable and explosive liquid without particles or fibers .
· Ambient temperature: no more than+40℃
· Altitude: no more than 1000M

Altitude and ambient temperature of domestic pump

· When the pump operates at an ambient temperature greater than 40℃ or an altitude greater than 1000m, the motor output power P2 will decrease. Under the above conditions, the motor power of the pump needs to be increased.

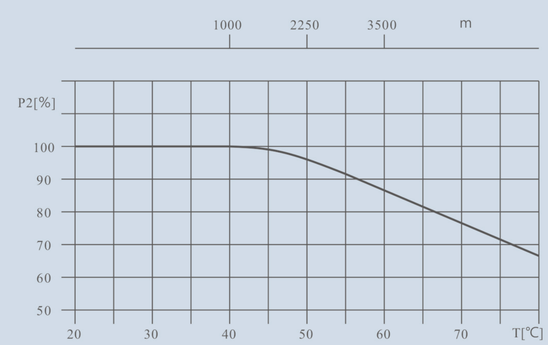

Working conditions and performance parameter range of fire pump

Adopt squirrel cage three-phase asynchronous motor

Rated voltage: 380V Installation form: V1
Cooling mode: IC411 Frequency: 50HZ
Degree of protection: IP55 Insulation class: F
Ambient temperature: no more than 40℃ and no less than - 15℃.
Connection method: 3kW and below is Y connection method, 4kW and above is △ connection method.

Flow range:1-60L/S
Inlet and outlet flange grade:1.6MPa
Motor level:Level 2/4
Pressure range:0.31-2.0MPa
Medium temperature:≤80°
Maximum allowable inlet pressure:0.4MPa
Inlet and outlet diameter:25mm-300mm

If there are special requirements, explain when ordering, and carry out production according to the special requirements of users

Application of fire pump products

It can be widely used in the water supply of fire-fighting systems of industrial and civil buildings (fire hydrant system, automatic sprinkler system, water spray fire-fighting system, etc.).

1 Special for fire protection, High reliability

The impeller is made of stainless steel and other corrosion- resistant materials to prevent Rust phenomenon and ensure that it can be started at any time.

2 Compact and reasonable structure

The pump is directly connected with the motor, with beautiful appearance and small floor area.

3 The whole series has obtained the fire protection certificate

According to the requirements of fire protection specifications, the whole series has obtained the fire protection certificate.

4 Optimized model and reasonable distribution

The head distribution is reasonable, which can meet the fire protection needs of different floors and pipe resistances.

5 New design according to fire pump standard

Fully meet the requirements of 1.5 times of high flow point lift and power.

MINGXING WATER SUPPLY

PASSED THE NATIONAL HIGH-TECH ENTERPRISE CERTIFICATION

Double-side Arc Rib Bolted Water Tank

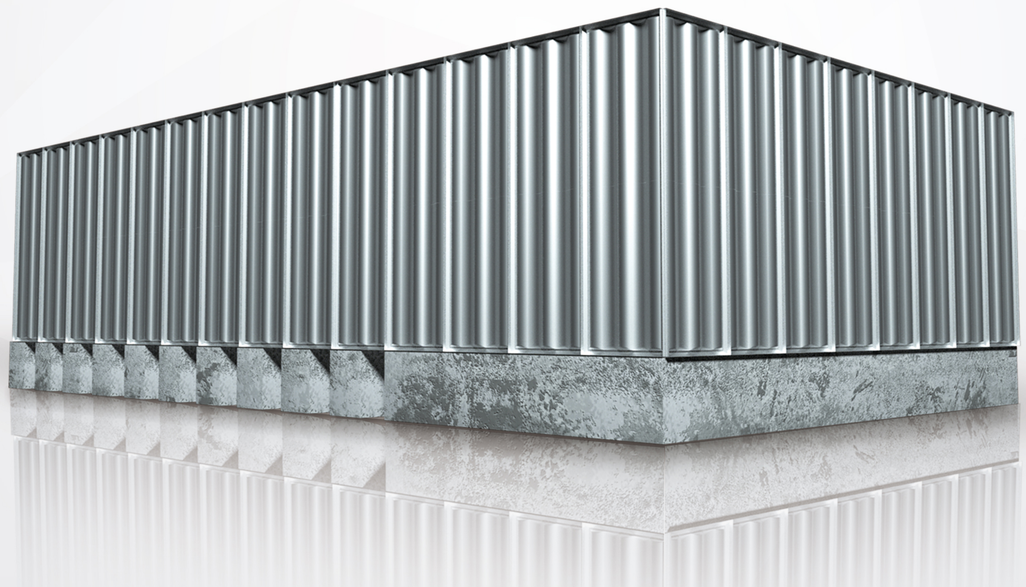

Performance and advantages

- High rigidity
- Without Tie bar
- Easy to clean
- No ponding

Scope of application

- Domestic hot and cold water tank
- Buried water tank.etc
- Fire water tank
- Industrial water tank

Technical parameter

· Plate size :1m*2m/1m*2.5m/1m*3.15m;
· Thickness:1.5、2.0、3.0、3.5、4.0;
· SW-I type: The tank is assembled from modules, which is made of SUS304-2B stainless steel bonded to hot-dip galvanized steel plates via metal adhesive in one-step molded and streched;
· SW-Ⅱ type:The tank is assembled from modules made by one-step compression molding,bonding SUS304-2B stainless steel plateson both sides to a hot-dip galvanized steelcore with metal adhesive;
· SWB type: SUS304 stainless steel plate module assembly Water tank;
· SWD type: all adopt hot-dip galvanized material molding assembly Water tank.

Focus on customer service with 'Integrity, Righteousness, Excellence'

Meet national standards, the most reassuring water tank

One time molding large module water tank

RAW MATERIAL

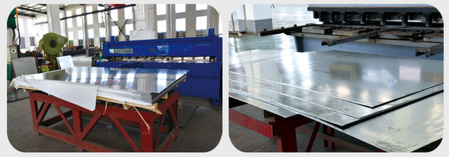

CUT CUSTOM SIZE

MOLDING STRETCHING

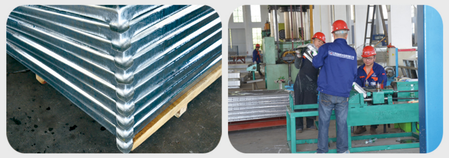

RESHAPING

SUB PACKAGING OF SEMI-FINISHED PRODUCTS

CUSTOM PUNCHING

AFTER THE PRODUCT PASSES THE INSPECTION, IT SHALL BE SUB PACKED ACCORDING TO THE ORDER

DELIVERY

MINGXING
WATER SUPPLY

PASSED THE NATIONAL HIGH-TECH ENTERPRISE CERTIFICATION

SW water tank（Bolted water tank）

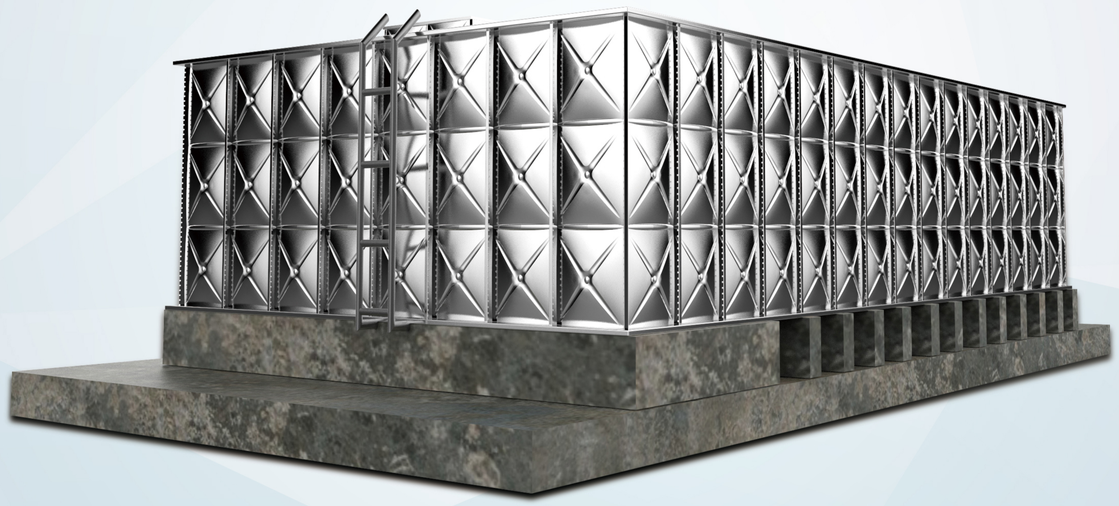

Performance and advantages

- Long service life
- Good seismic performance
- Clean and sanitary
- Energy conservation and environmental protection
- High rigidity

Scope of application

- Domestic hot and cold water tank
- Fire water tank
- Buried water tank, etc

Technical parameter

· Plate size: 1m*2m/1m*3m/1m*4m;
· Thickness: 1.5, 2.0, 3.0, 3.5, 4.0;
· SW-I type: The tank is assembled from modules, which is made of SUS304-2B stainless steel bonded to hot-dip galvanized steel plates via metal adhesive in one-step molded and stretched;
· SW-Ⅱ Type:The tank is assembled from modules made by one-step compression molding,-bonding SUS304-2B stainless steel plates on both sides to a hot-dip galvanized steel core with metal adhesive;
· SWB type: SUS304 stainless steel plate module assembly Water tank;
· SWD type: all adopt hot-dip galvanized material molding assembly Water tank.

Focus on customer service with ‘Integrity, Righteousness, Excellence’

Meet national standards, he most reassuring water tank

One time molding large module water tank

RAW MATERIAL

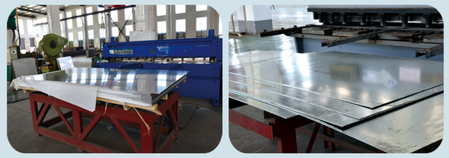

CUT CUSTOM SIZE

MOLDING STRETCHING

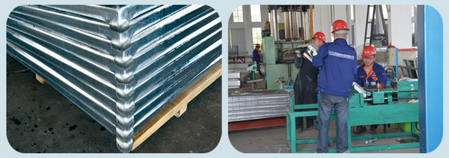

RESHAPING

SUB PACKAGING OF SEMI-FINISHED PRODUCTS

CUSTOM PUNCHING

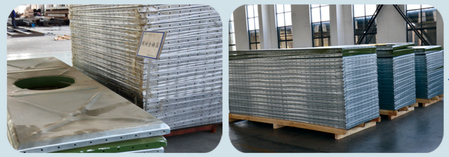

AFTER THE PRODUCT PASSES THE INSPECTION, IT SHALL BE SUB PACKED ACCORDING TO THE ORDER

DELIVERY

MINGXING
WATER SUPPLY

PASSED THE NATIONAL HIGH-TECH ENTERPRISE CERTIFICATION

Several types of bolted water tank

SWB large module water tank

Water tank assembled with SUS304 stainless steel plate module

➤ Technology

The stainless steel plate is cut into the required specifications, molded and stretched by a 2500t press at one time, and then automatically punched by corner cutting. The specification of each module is 1000*2000/3000. The corresponding height can be customized according to the height of different water tanks to form a molded block without transverse joints; Each module is strengthened to bear the lateral pressure of water and improve the seismic performance of the water tank. Then each module is connected by bolts, realizing that each module is completely formed without welding.

➤ Advantage

1. The box modules are all formed by one-time tensile molding without welds and assembled by bolts to avoid intergranular corrosion and stress corrosion after welding;
2. Using steel with strength greater than or equal to 235, and adding X shape on the outer convex arc surface after molding, the stiffness is more than 3 times higher than that of the simple outer convex arc surface;
3. Equipped with automatic cleaning device to avoid personal injury during cleaning;
4. All parts in contact with water are made of SUS304 sanitary stainless steel;
5. The sales price of the water tank with the same volume is the same, the service life of the welded water tank is ≤ 10 years, and the service life of the large module water tank is ≥ 70 years, which is the same as that of the building;
6. Respond to the national call for ‘energy, land, water, materials and environmental protection’;
7. It has a wide range of applications and can be used for: domestic hot and cold water tanks, fire water tanks, production and processing water storage tanks.

SW-I large module water tank

The water tank is assembled with modules made of SUS304-2B stainless steel plate and hot-dip galvanized plate by one-time molding and stretching with metal glue on one side

➤ Technology

The stainless steel plate and hot-dip galvanized steel plate are cut into the required specifications after being compounded with polymer metal glue, and then molded and stretched by a 2500t press at one time, and then automatically punched by corner cutting. The specification of each module is 1000*2000/3000, and the corresponding height can be customized according to the height of different water tanks to form a molded block without transverse joints; Each module is strengthened to bear the lateral pressure of water and improve the seismic performance of the water tank. Then each module is connected by bolts, realizing that each module is completely formed without welding.

➤ Advantage

1. The box modules are all formed by one-time tensile molding without welds and assembled by bolts to avoid intergranular corrosion and stress corrosion after welding;
2. Using steel with strength greater than or equal to 235, and adding X shape on the outer convex arc surface after molding, the stiffness is more than 3 times higher than that of the simple outer convex arc surface;
3. The water tank is made of single-sided stainless steel + hot galvanizing, which is cost-effective;
4. Equipped with automatic cleaning device to avoid personal injury during cleaning;
5. All parts in contact with water are made of SUS304 sanitary stainless steel;
6. The sales price of the water tank with the same volume is the same, the service life of the welded water tank is ≤ 10 years, and the service life of the large module water tank is ≥ 70 years, which is the same as that of the building;
7. Respond to the national call for ‘energy, land, water, materials and environmental protection’;
8. It has a wide range of applications and can be used for: domestic hot and cold water tanks, fire water tanks, production and processing water storage tanks.

High quality raw materials, exquisite Technology, flat and smooth

Direct sales from the head office, various specifications support customization

SW-II large module water tank

The water tank is assembled with modules made of SUS304-2B stainless steel plate and hot-dip galvanized plate by one-time molding and stretching with metal glue on both sides

➤ Technology

The stainless steel plate and hot-dip galvanized steel plate are cut into the required specifications after being compounded with polymer metal glue, and then molded and stretched by a 2500t press at one time, and then automatically punched by corner cutting. The specification of each module is 1000*2000/3000, and the corresponding height can be customized according to the height of different water tanks to form a molded block without transverse joints; Each module is strengthened to bear the lateral pressure of water and improve the seismic performance of the water tank. Then each module is connected by bolts, realizing that each module is completely formed without welding.

➤ Advantage

1. The box modules are all formed by one-time tensile molding without welds and assembled by bolts to avoid intergranular corrosion and stress corrosion after welding;
2. Using steel with strength greater than or equal to 235, and adding X shape on the outer convex arc surface after molding, the stiffness is more than 3 times higher than that of the simple outer convex arc surface;
3. The water tank is made of double-sided stainless steel + hot galvanizing, which is cost-effective and beautiful;
4. Equipped with automatic cleaning device to avoid personal injury during cleaning;
5. All parts in contact with water are made of SUS304 sanitary stainless steel;
6. The sales price of the water tank with the same volume is the same, the service life of the welded water tank is ≤ 10 years, and the service life of the large module water tank is ≥ 70 years, which is the same as that of the building;
7. Respond to the national call for ‘energy, land, water, materials and environmental protection’;
8. It has a wide range of applications and can be used for: domestic hot and cold water tanks, fire water tanks, production and processing water storage tanks.

SWD large module water tank

All water tanks are made of molded hot-dip galvanized material

➤ Technology

The hot-dip galvanized steel plate is cut into the required specifications, molded and stretched by a 2500t press at one time, and then automatically punched by corner cutting. The specification of each module is 1000*2000/3000. The corresponding height can be customized according to the height of different water tanks to form a molded block without transverse joints; Each module is strengthened to bear the lateral pressure of water and improve the seismic performance of the water tank. Then each module is connected by bolts, realizing that each module is completely formed without welding.

➤ Advantage

1. The box modules are all formed by one-time tensile molding without welds and assembled by bolts to avoid intergranular corrosion and stress corrosion after welding;
2. Using steel with strength greater than or equal to 235, and adding X shape on the outer convex arc surface after molding, the stiffness is more than 3 times higher than that of the simple outer convex arc surface;
3. The sales price of the water tank with the same volume is the same, the service life of the welded water tank is ≤ 10 years, and the service life of the large module water tank is ≥ 70 years, which is the same as that of the building;
4. It is made of fully hot-dip galvanized material, with good corrosion resistance and ultra-high cost performance;
5. Respond to the national call for ‘energy, land, water, materials and environmental protection’;
6. It has a wide range of applications and can be used for: fire water tank and production and processing water tank.

MINGXING
WATER SUPPLY

PASSED THE NATIONAL HIGH-TECH ENTERPRISE CERTIFICATION

Stainless steel welded water tank

Performance and advantages

· Smooth line shape and good stereoscopic feeling
· Strong corrosion resistance
· Cleanliness and hygiene

Scope of application

· It can be used for cold water, hot water and fire water that meet the sanitary standards of drinking water;
· The water temperature is not more than 60 ℃;
· It is not suitable for the storage of boiled water, softened water, geothermal water, etc.

Technical parameter

· The dimensions of the standard formwork block of the water tank are: 1m*1m, 1m*0.5m, 0.5m*0.5m;
· Requirements for the foundation of stainless steel water tank: the foundation size should be formulated according to the relevant provisions of GB02S101: the height difference of the foundation plane should be <5mm, the size of the foundation should be consistent according to the size of the water tank, the center distance of two adjacent foundations should be ≤ 1000mm, and the width of a single concrete foundation should be ≥ 240mm;
· The channel steel at the base of the water tank is generally 10# channel steel, and the large-size water tank is optional;
· The material of the brace in the water tank is the same as that of the water tank.

Focus on customer service with 'Integrity, Righteousness, Excellence'

Cold water and fire water that meet the sanitary standards for drinking water

Smooth lines, good three-dimensional sense, strong corrosion resistance

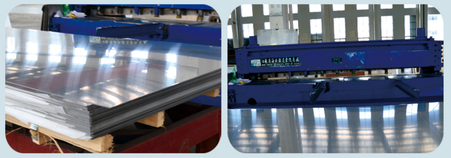

SHEAR

DIE-CUT

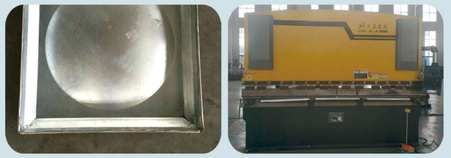

EDGE FOLD

COMPRESSION MOLDING

TO BE INSPECTED

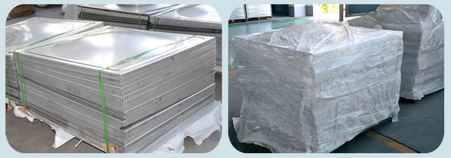

INSPECTION AND PACKAGING

DELIVERY

MINGXING
WATER SUPPLY

PASSED THE NATIONAL HIGH-TECH ENTERPRISE CERTIFICATION

Elevated water tank with steel tower

Performance and advantages

The elevated water tank with steel tower is carried out by using the working pump mode. The elevated water tank is equipped with upper and lower limit water level switches. Once the water level of the water tank reaches the upper limit water level, the automatic control system will control the water pump to stop water supply or switch to small flow water supply. When the elevated water tank reaches the lower limit water level, the system will give an alarm signal, which can be automatically or manually reacted to start the water pump for water supply. Its function is to replenish water for the system under self pressure. If there is leakage in the water pipe, it can be injected into the pipe by itself.

Focus on customer service with 'Integrity, Righteousness, Excellence'

Working principle

Water supply from elevated water tank is a common way of high- rise water supply. It is mainly composed of water storage tank, pressurized water pump, elevated water tank and water distribution network. The function of elevated water tank in water supply system is mainly to store water, regulate water volume and stabilize water pressure. The water supply mode of elevated water tank can be divided into parallel water supply mode, series water supply mode, pressure reducing water tank water supply mode, pressure reducing valve water supply mode, etc.

Water supply mode

Parallel water supply mode

◎ In this way, water tanks and pumps are set independently in each zone, and the pumps are centrally arranged on the ground floor or basement of the building to supply water to each zone without towers.

◎ The advantages of this water supply mode are: since each district is an independent water supply system, the water supply is safe and reliable; The water tanks are scattered, and the volume of water tanks in each area is small, which is conducive to structural design and economical operation power cost; The water pumps are arranged in a centralized way, which is convenient for maintenance and management. Its disadvantages are that there are many water pumps, long high- pressure water supply pipelines, high investment costs, and the water tank occupies a large area of the superstructure. Because the water supply of this system is safe and reliable, and the operation cost is relatively economic, this method is widely used in high- rise buildings at home and abroad. For super high- rise buildings (with a height of more than 100 m), due to the restrictions of pump lift, pressure bearing of pipe fittings and the influence of water hammer noise, it is not suitable to adopt them blindly.

Series water supply mode

◎ In this way, the water pump and water tank are scattered in the floors of each district. The water tank in the lower district is also used as the water tank in the upper district. The water pump is pumped from the water tank in the lower district to the water tank in the upper District, and then the water tank supplies water to each district.

◎ The advantages of this water supply method are: the pump pressure is relatively balanced, the required head is small, the impact of water hammer is small, and the energy consumption is reasonable. Its disadvantages are: scattered equipment layout, large occupied area, inconvenient management; The water pump is set on the floor, which has high requirements for shockproof and noise isolation; The water supply in the upper area is limited by the lower area, so the reliability of water supply is poor.

Reduced pressure water supply mode

◎ Reduced pressure water supply mode is to lift the water consumption of the whole high- rise building from the water pump set on the bottom floor to the roof water tank, and then send the water to the water supply system of each district after decompression through the decompression device of each district. According to the different pressure reducing methods, this method can be divided into pressure reducing tank water supply mode, partition pressure reducing valve water supply mode and sequential pressure reducing valve water supply mode along the vertical riser.

MINGXING
WATER SUPPLY

PASSED THE NATIONAL HIGH-TECH ENTERPRISE CERTIFICATION

Thermal insulation water tank

Prefabricated thermal insulation water tank

Welded type thermal insulation water tank

Performance and advantages

Welded water tanks are generally made of rubber and plastic cotton plus stainless steel plates. Polyurethane insulation is used for some projects with special requirements. Prefabricated aboveground water tanks are made of rubber and plastic cotton plus colored steel tiles for insulation. Generally, only manholes buried underground need insulation, and EPS board and galvanized plates are used.

Installation position

Heat preservation water tank can be installed on flat roof, ground or household series, and can also be installed on outdoor balcony, indoor kitchen, bathroom and other positions.

Focus on customer service with 'Integrity, Righteousness, Excellence'

Composition and structure

◎ Thermal insulation water tank refers to adding special industrial and thermal insulation materials to the interlayer of the water tank to keep the water tank at a certain temperature to meet the needs of life or industry.
◎ It is composed of high water tank, storage tank and low water tank. The high water tank is equipped with mechanically controlled water lubricator, flushing valve, drain valve and electrode float switch. The valve seats of the lubricator and flushing valve are respectively connected with the three- way flushing pipe set in the storage tank. The drain valve is opened, and the high water tank is connected with the storage tank; A lever type float switch is set in the low water tank, the float valve core is opened, and the water storage tank is connected with the low water tank; The low water tank is also equipped with a submersible pump, a filter and a sewage pipe. The outlet of the submersible pump is located in the high water tank. The shutdown of the submersible pump is controlled by the electrode float switch in the high water tank. The use of medium water tank can save a lot of potable clean water, with remarkable social and economic benefits. The medium water tank can be used with various types of existing toilets. It can be installed and used in hotels, restaurants, enterprises and institutions with large water consumption.

Thermal insulation material

Stainless steel welded water tank insulation

◎ The inner layer is made of rubber and plastic cotton or Polyurethane, and the outer layer is made of stainless steel plate or color steel plate.

Insulation of aboveground pump station

◎ Rubber plastic cotton colored steel plate.

Matters needing attention

◎ Heat preservation water tank can be installed on flat roof, ground or household series, and can also be installed on outdoor balcony, indoor kitchen, bathroom and other positions.
◎ The installation position of the thermal insulation water tank should be convenient for the drainage of the sewage outlet, and the hot water tank should be as close to the water point and the installation position of the host as possible to reduce the heat loss of the pipeline.
◎ For floor engineering, the water tank should be placed on the bearing beam regardless of its size; If the water tank is more than 5 tons, the customer is required to make a bearing foundation, and the bearing capacity of the bearing foundation should be greater than twice the weight of the water tank after it is filled with water; When the floor is relatively wide or the water tank is relatively large, it is recommended that the customer divide the water tank into multiple water tanks and place them on the bearing beam (under normal circumstances, a single round water tank should not exceed 10 tons, and a single square water tank should not exceed 20 tons).
◎ The heat preservation water tank should be placed on the roof with stainless steel mirror reflection, which will affect the surrounding office or living environment.
◎ For the floor installation of the thermal insulation water tank, an installation horizontal foundation with a height of more than 150mm must be made, and the location of the water tank should not affect the surrounding residents.
◎ The foundation of the thermal insulation water tank needs a horizontal plane, and there should be no ponding on the foundation plane; If the bracket is welded with I-beam or channel steel, the position of the water tank must be paved with steel plate.

MINGXING
WATER SUPPLY

PASSED THE NATIONAL HIGH-TECH ENTERPRISE CERTIFICATION

Fire pressure stabilizing equipment

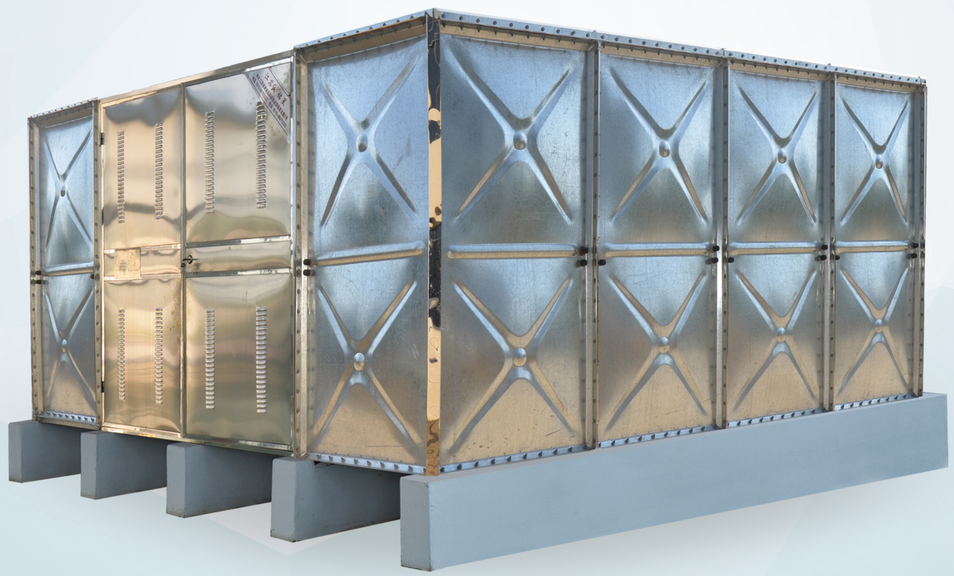

Performance and advantages

· The box is installed with modular plates, with modular equipment and short installation cycle;
· Save space, no need to build pump room, save investment;
· Energy saving and environmental protection: This product can be reused and regenerated, which fully conforms to the national environmental protection standards, and has low noise;
· Convenient maintenance and overhaul.

Scope of application

· It is applicable to various fire water supply systems such as fire hydrant water supply system and wet automatic sprinkler system with pressure stabilizing facilities in multi-storey and high-rise building projects;
· Fire hydrant system: the flow rate of water gun per share is 2.5l/s, 5l/s, and the length of enriched water column is 7m, 10m, 13m;
· Automatic sprinkler system: the flow rate of each nozzle is 1.0l/s, and the nozzle pressure is 0.1MPa;
· The ambient temperature of the equipment should be 5 ℃ ~40 ℃.

Technical parameter

· Working pressure of pneumatic water tank: 0.6MPa;
· The effective fire water storage volume of the pneumatic water tank is 150L;
· The backlog difference of buffer water capacity of pneumatic water tank is 0.02~0.03mpa, and the backlog difference of stabilized pressure water capacity is 0.05~0.06mpa;
· Working pressure ratio: 0.6~0.85;
· Effective volume of box: $6m^3$、$12m^3$、$18m^3$、$36m^3$、$50m^3$、$100m^3$。

Focus on customer service with 'Integrity, Righteousness, Excellence'

Complete set of equipment, easy to install

Noise ≤ 65dB



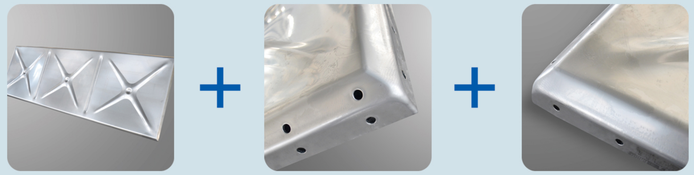

Box body ➤ SW large module water tank

The use of SW large module in the fire pressure boosting and stabilizing equipment can save space, eliminate the need to build a pump room, save investment, solve the rust and cleaning problems of the water tank, and can be disassembled, used and regenerated twice. It fully conforms to the provisions of national environmental protection standards, and has low noise, convenient maintenance and overhaul, and ultra-high price ratio.

Pump house ➤ Diaphragm pressure tank + water pump + electric cabinet

Two stabilized pressure water pumps, one for use and one for standby, work in turn, switch automatically, and operate alternately. At ordinary times, the fire pipe network is in a high-pressure state, and a certain amount of water is stored in the tank. Due to leakage and other reasons, when the system pressure drops to PS1, the No. 1 pump starts automatically, and when the water pressure rises to PS2, the pump stops. When the next pressure drops to PS1, the No. 2 pump starts automatically, so that the system pressure is always maintained between PS1 and PS2.

Electric control panel ➤

Input liquid level gauge display + double power switch + intermediate relay + AC contactor

The electric control system has automatic and manual functions, and is linked with the fire control center or the fire pump room. Once a fire occurs, the flow switch output signal automatically starts the fire pump, and has the functions of local display and remote display of normal liquid level and high and low water level alarm.

MINGXING
WATER SUPPLY

PASSED THE NATIONAL HIGH-TECH ENTERPRISE CERTIFICATION

Intelligent fire water supply unit

Equipment structure

The integrated structure of the unit, control system and information processing system: the equipment is standardized, modular production, and highly integrated. The unit, control system and information processing system realize the overall inspection and testing before leaving the factory, and can operate after being powered on and touching the pipe.

Application site

The intelligent fire water supply unit of the Internet of things is applicable to various fire water supply systems of industrial and civil construction projects (such as factories, warehouses, storage tanks, stations, airports, hospitals, offices, businesses, garages, exhibition buildings, cultural and sports buildings, cinemas, residences, urban complexes, etc.).

Focus on customer service with 'Integrity, Righteousness, Excellence'

Work environment

Supply voltage	380V(±15%), Three phase five wire system
Ambient temperature	-5℃-40℃(If it exceeds the scope, corresponding measures must be taken)
Installation location	No conductive dust, gases that can corrode metals and damage insulation, no explosion hazard
Altitude	It shall not exceed 2000m, and the control components shall be adjusted accordingly when it exceeds

Main features of the equipment

Data acquisition and remote transmission

The working condition and operation data information of the traditional fire water supply unit equipment are only displayed on the display screen and graphic display of the alarm host, and cannot be transmitted to the designated mobile terminal, computer terminal and other display terminals; By using intelligent fire- fighting equipment, these information can be transmitted to the cloud, and can be displayed on the mobile terminal (mobile phone, computer) or even the display and monitor you want in real time. The system can also push notification and alarm information to the mobile terminal in real time, which brings great convenience to the management of fire-fighting equipment. Not only the alarm information can be transmitted remotely, but also the water level, water pressure of the fire pool, the working state of the fire pump, the fire power supply parameters and the operation data of the diesel fire pump can be transmitted remotely, providing reliable data support for the peacetime maintenance of the fire unit, but also ensuring the safe and stable operation of the fire unit during the war.

Data statistical analysis and state evaluation

In addition to collecting the working conditions and operating data of the equipment and realizing remote transmission, the information system of the fire fighting unit has the function of data statistics and analysis. The information system analyzes the health status evaluation of the fire- fighting unit through the real- time collected motor operating parameters and water supply parameters of the pump, combined with the performance curve of the fire- fighting pump itself, and provides users with fault analysis and maintenance opinions of the fire- fighting unit.

Intelligent control

Using information collection, remote transmission and Internet, the fire fighting unit can provide unified management convenience to the management personnel (property) of the fire fighting equipment and the superior supervision department according to the requirements of users. It can not only provide the equipment operation data and working status in real time, but also display various reports, trend charts and other auxiliary analysis data charts as required, and can also query the equipment operation history, file management Maintain records, logs, etc., to provide users with auxiliary decisions.

Excellent control system

Main power meter

Monitor the power supply status, measure whether the power supply is within the normal range in an all- round way, and measure the power consumption for a period of time.

Mechanical emergency starting device

Regardless of the damage of the control circuit in the fire pump control cabinet, the pump can be forced to start directly to ensure the timeliness of fire fighting.

One in two out signal isolator

Isolate and convert the on-site signals into two channels of the same or different current and voltage signals, and fully isolate the input, output, power supply and channels, so as to realize the simultaneous acquisition and control of different devices.

Temperature and humidity controller

Temperature and humidity detection and real-time display. If the ambient temperature is too high, the fan will be automatically put into heat dissipation, and if the ambient humidity is too high, the heating plate will be put into temperature rise to prevent condensation.

Intelligent voice alarm device

If the safety warning content is displayed in a plane form, it will be ignored and has no good warning effect. However, the voice warning device will automatically broadcast when it senses someone's arrival, so as to make the safety warning to the extreme.

Overflow alarm device

In order to prevent water leakage, automatic overflow detection and overflow / leakage alarm are provided. The overflow alarm has changed the mode of manual inspection, making the overflow monitoring more economical and intelligent, so as to realize unattended.

Heating plate

Temperature rise to prevent condensation

Security power 12V power supply

A standard voltage is converted into the voltage or current required by the user through different forms of architecture.

Five port switch

Connecting network devices and terminal devices.

MINGXING
WATER SUPPLY

PASSED THE NATIONAL HIGH-TECH ENTERPRISE CERTIFICATION

Digital full frequency conversion stabilized pressure tank type without negative pressure

Performance and advantages

· Multiple guarantee design ensures that the municipal government does not produce negative pressure;
· When the municipal water supply is insufficient, actively adjust the municipal water intake;
· The equipment is made of stainless steel and fully enclosed, which is environmentally friendly and hygienic;
· Compact equipment design, saving floor space;
· When running with multiple pumps, the frequency is consistent and the load is balanced, and the energy-saving rate is more than 15%.

Scope of application

· Domestic water for residents: such as high-rise buildings,residential quarters, villas,etc;
· Public places: such as hospitals, schools, gymnasiums, golf courses, airports, etc;
· Commercial buildings: such as hotels, office buildings, department stores, large saunas, etc;
· Irrigation: such as parks, amusement parks, orchards, farms, etc;
· Manufacturing: such as manufacturing enterprises, washing devices, food processing plants, etc.

Technical parameter

· Flow range: 0- 300m³/h;
· Pressure range: 0- 2.5mpa;
· Pressure regulation accuracy: ≤ 0.01Mpa;
· Ambient temperature: 0℃~40℃, if it exceeds this range, corresponding measures must be taken;
· Power supply: three- phase five wire 380V×（±5%）50Hz±2Hz.

Focus on customer service with
'Integrity, Righteousness, Excellence'

Intelligent regulation of municipal water intake to prevent negative pressure

Environmental protection and sanitation, land saving, energy saving rate of more than 15%

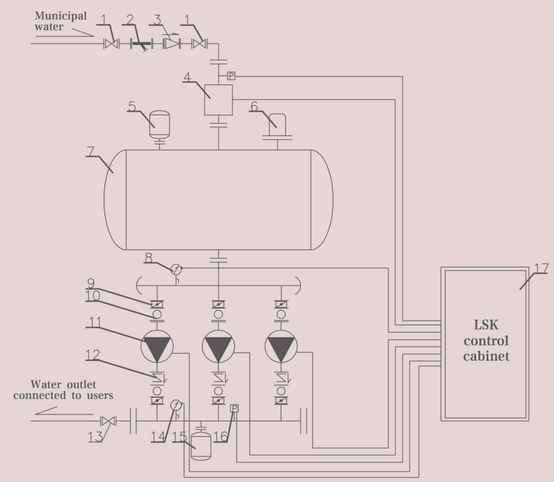

System diagram of digital full frequency conversion stabilized pressure tank type negative pressure free equipment

>> Equipment advantages

☆ **No negative pressure:** intelligently adjust the municipal water intake to prevent negative pressure;
☆ **Energy saving:** make full use of municipal residual pressure, with good energy saving effect;
☆ **Environmental protection and sanitation:** the equipment is fully enclosed design, and it is not connected with the outside world during operation;
☆ **Save land occupation:** there is no need for pools and water tanks, and the equipment design is compact, saving land occupation;
☆ **Municipal pressure stabilization function at the upper end:** when the municipal pressure fluctuates, the equipment has a good effect of voltage stabilization and current stabilization;
☆ **Pump room overflow alarm system:** our patented pump room overflow alarm system monitors the water leakage of the pump room in real time to prevent the accident of flooding the pump room;
☆ **Multi functional water quality online monitoring system:** the multi-functional water quality online monitoring system designed by our company can monitor the residual chlorine, turbidity, pH and other water quality indicators of the equipment inlet and outlet water in real time to ensure the safe use of water by users.

>> Leading control system

☆ **Digital full frequency conversion design:** when multiple water pumps operate, the operation frequency of each water pump is consistent and the load is balanced. Through actual calculation, the energy saving rate is more than 15% compared with traditional equipment;
☆ **Water supply function in different periods:** different outlet pressures can be set in different periods of time to improve water comfort and reduce energy consumption;
☆ **Full data detection:** system voltage, current, total power consumption of equipment, pump operating frequency, current, power consumption and other full data detection systems, which can transmit data to the monitoring platform for monitoring and analysis;
☆ **Comprehensive protection:** power phase loss, phase sequence protection, surge lightning protection, equipment inlet low voltage protection, equipment outlet overpressure, loss of voltage protection, etc;
☆ **Universal design:** the standard electrical components in the industry can be applied to our control system, and the later maintenance and replacement are simple;
☆ **Intelligent fault diagnosis:** alarm in real time when the fault occurs, and display the cause of the fault on the touch screen to guide after-sales maintenance;
☆ **Pipe burst or leakage protection:** the system intelligently diagnoses pipe burst or leakage accidents, controls equipment shutdown and sends audible and visual alarm information;
☆ **Temperature and humidity monitoring system:** the temperature and humidity monitoring system is set in the control cabinet to jointly control the operation of intelligent cooling fan and automatic dehumidification equipment, so as to escort the good operation of the control system;
☆ **Reserved data interface:** residual chlorine, turbidity, flow detection interface, RS485 or Ethernet remote transmission interface can be reserved;
☆ **High protection grade of the cabinet:** the protection grade of the control cabinet reaches IP54, which has good dust-proof and splash proof effects.

MINGXING
WATER SUPPLY

PASSED THE NATIONAL HIGH-TECH ENTERPRISE CERTIFICATION

Digital full frequency conversion with water quality improvement function

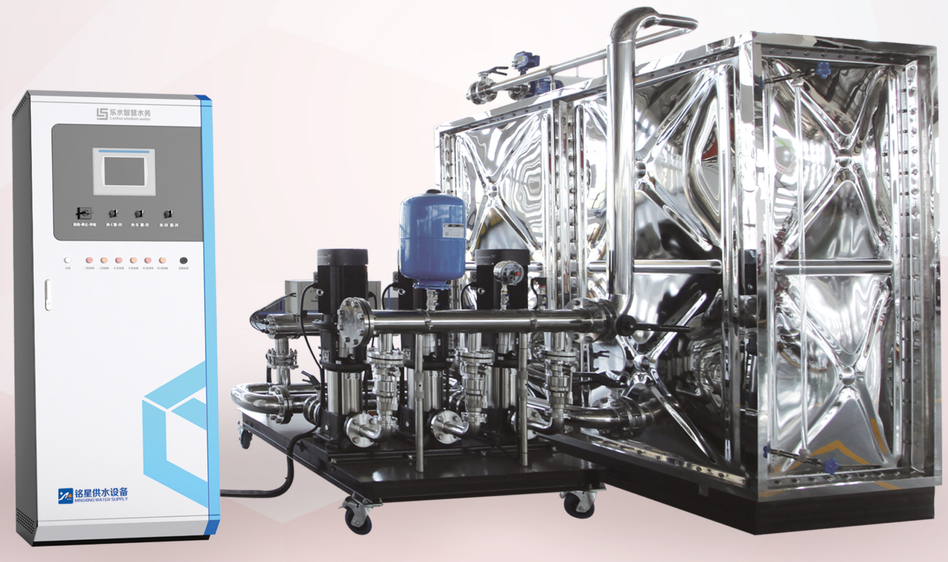

Performance and advantages

· The water tank inlet is equipped with an integrated controller to keep the water flowing, effectively solving the problems of dead water layer and retention layer;
· The flow passage parts are processed with high-quality food grade SUS304 and above materials, which are environmentally friendly and hygienic;
· The application of SW large module water tank prevents the problem of water tank rusting;
· Uninterrupted water supply during water tank repair and maintenance;
· The ultraviolet sterilizer has high sterilization efficiency and special design, which makes the ultraviolet sterilizer have a longer service life;
· Multiple guarantee design to comprehensively improve water quality;
· When running with multiple pumps, the frequency is consistent and the load is balanced, and the energy-saving rate is more than 15%.

Scope of application

· Domestic water for residents: such as high- rise buildings, residential quarters, villas, etc;
· Public places: such as hospitals, schools, gymnasiums, golf courses, airports, etc;
· Commercial buildings: such as hotels, office buildings, department stores, large saunas, etc;
· Irrigation: such as parks, amusement parks, orchards, farms, etc;
· Manufacturing: such as manufacturing enterprises, washing devices, food processing plants, etc.

Technical parameter

· Flow range: 0- 300m³/h;
· Pressure range: 0- 2.5mpa;
· Pressure regulation accuracy: ≤ 0.01Mpa;
· Ambient temperature: 0℃~40℃, if it exceeds this range, corresponding measures must be taken;
· Power supply: three-phase five wire 380V×（±5%）50Hz±2Hz.

Focus on customer service with
'Integrity, Righteousness, Excellence'

Comprehensively improve users' water quality and ensure water safety

Full frequency conversion design, energy saving rate of more than 15%

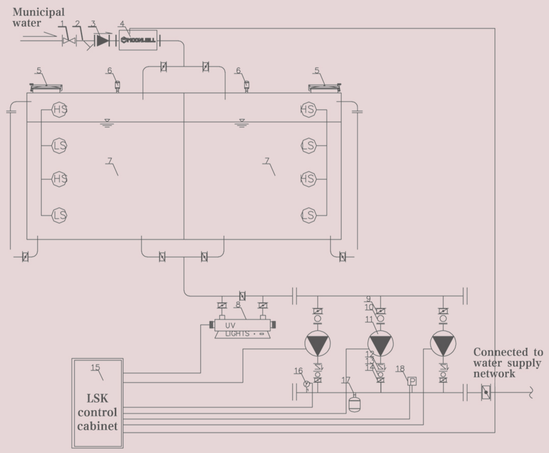

Flow chart of constant voltage frequency conversion equipment with water quality improvement function

>> Equipment advantages

☆ **Water quality improvement function:** comprehensively improve the water quality through the design and use of influent flow controller, SW large module water tank with grid design, UV sterilizer, automatic cleaning device of water tank, etc;
☆ **Water inlet integrated control device:** the high and low liquid levels of the water tank can be set, and the retention time of water storage can be controlled, which effectively solves the problems of stagnant water layer, retention layer and water quality that have existed in the water tank for a long time;
☆ **SW large module water tank:** it has three advantages: no transverse joints, no braces, and no welding, so as to eliminate the problem of water tank rust, and it is more convenient to clean the water tank;
☆ **Application of ultraviolet sterilizer:** more efficient and faster sterilization effect without disinfection by-products; The unique operation control extends the service life of the lamp tube;
☆ **Uninterrupted water supply:** the water tank is designed in a grid, and in case of maintenance of the water tank, the water supply can be uninterrupted;
☆ **Multiple control and protection functions of water outlet pressure:** water outlet is equipped with pressure sensing and control devices to play multiple control and protection functions;
☆ **Pump room overflow alarm system:** the pump room overflow alarm system patented by our company monitors the liquid leakage of the pump room in real time to prevent the accident of flooding the pump room;
☆ **Multi functional water quality online monitoring system:** the multi-functional water quality online monitoring system designed by our company can monitor the residual chlorine, turbidity, pH and other water quality indicators of the equipment inlet and outlet water in real time to ensure the safe use of water by users.

>> Leading control system

☆ **Digital full frequency conversion design:** when multiple water pumps operate, the operation frequency of each water pump is consistent and the load is balanced. Through actual calculation, the energy saving rate is more than 15% compared with traditional equipment;
☆ **Water supply function in different periods:** different outlet pressures can be set in different periods of time to improve water comfort and reduce energy consumption;
☆ **Full data detection:** system voltage, current, total power consumption of equipment, pump operating frequency, current, power consumption and other full data detection systems, which can transmit data to the monitoring platform for monitoring and analysis;
☆ **Comprehensive protection:** power phase loss, phase sequence protection, surge lightning protection, equipment inlet low voltage protection, equipment outlet overpressure, loss of voltage protection, etc;
☆ **Universal design:** the standard electrical components in the industry can be applied to our control system, and the later maintenance and replacement are simple;
☆ **Intelligent fault diagnosis:** alarm in real time when the fault occurs, and display the cause of the fault on the touch screen to guide after-sales maintenance;
☆ **Pipe burst or leakage protection:** the system intelligently diagnoses pipe burst or leakage accidents, controls equipment shutdown and sends audible and visual alarm information;
☆ **Temperature and humidity monitoring system:** the temperature and humidity monitoring system is set in the control cabinet to jointly control the operation of intelligent cooling fan and automatic dehumidification equipment, so as to escort the good operation of the control system;
☆ **Reserved data interface:** residual chlorine, turbidity, flow detection interface, RS485 or Ethernet remote transmission interface can be reserved;
☆ **High protection grade of the cabinet:** the protection grade of the control cabinet reaches IP54, which has good dust-proof and splash proof effects.

Aboveground intelligent integrated pump station

To survive by quality,
To develop by quality and to benefit from quality.

Gather the wisdom Achievement dream

Buried intelligent integrated pump station

In the spirit of craftsman, focus on making quality products for you

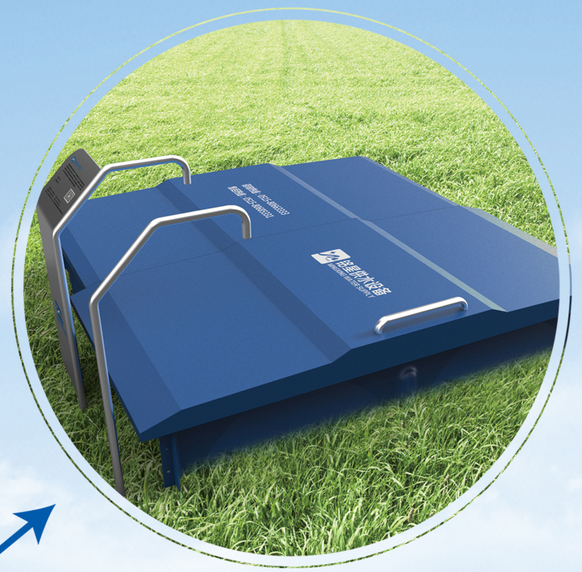

Manhole

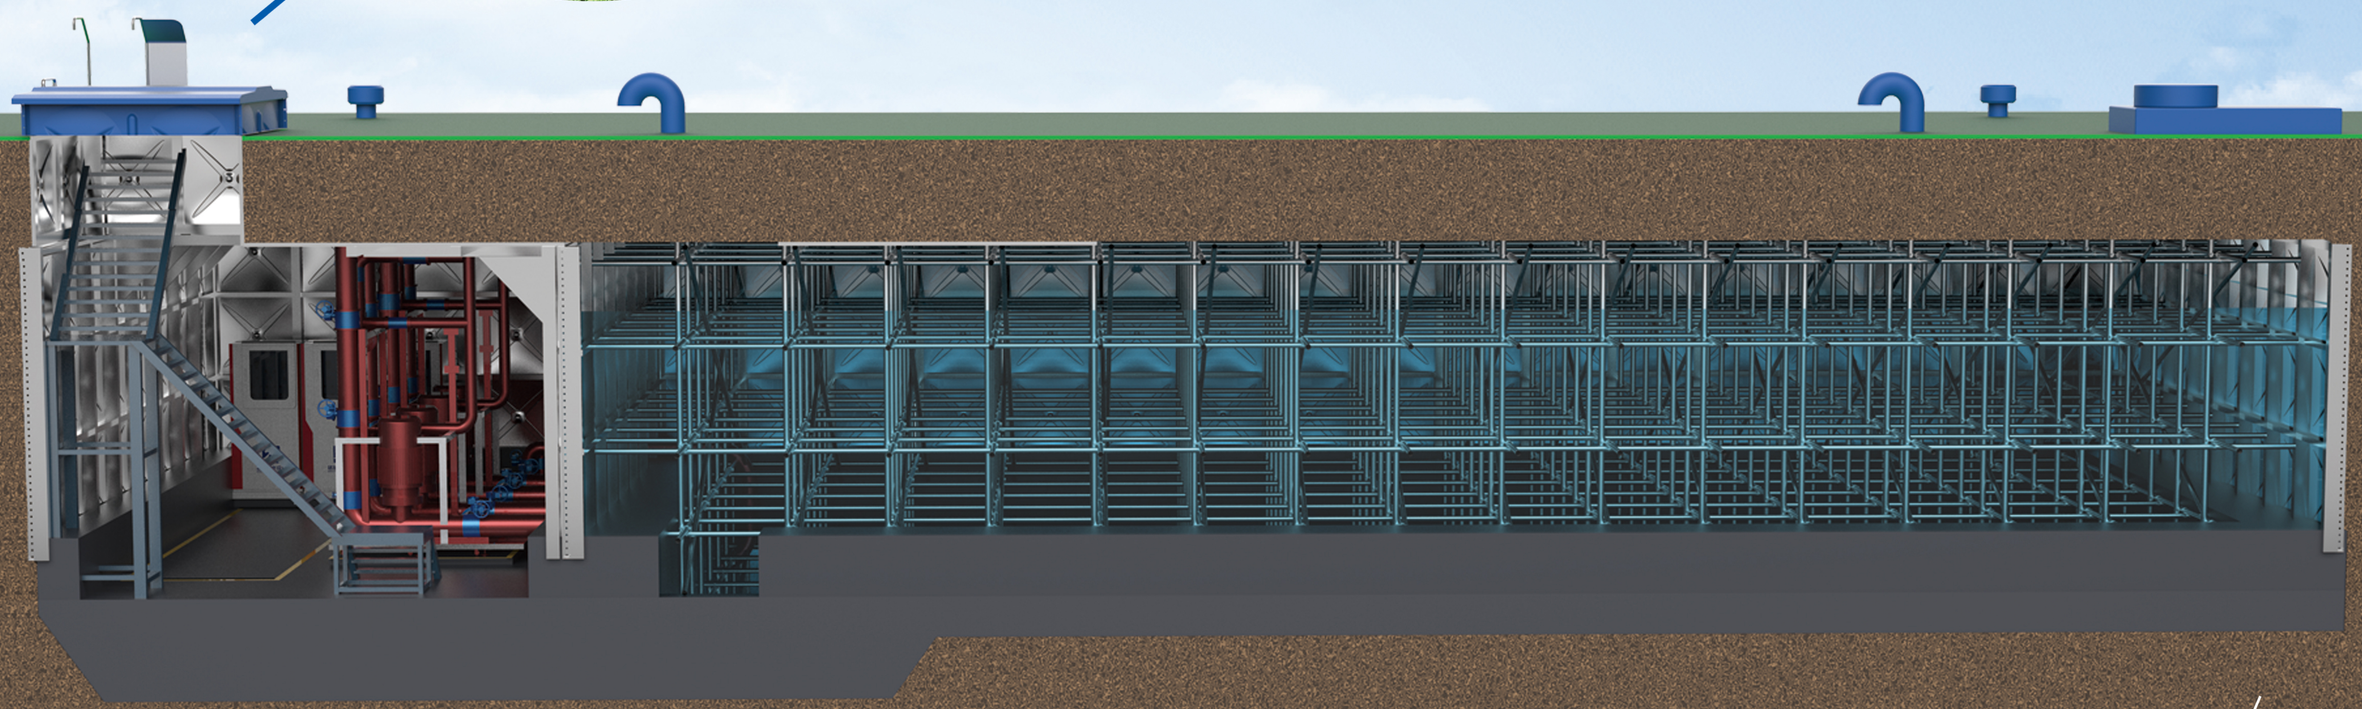

Pump room area

Water tank area

LIFE FIRE

Gather the wisdom Achievement dream

Some fire fighting cases

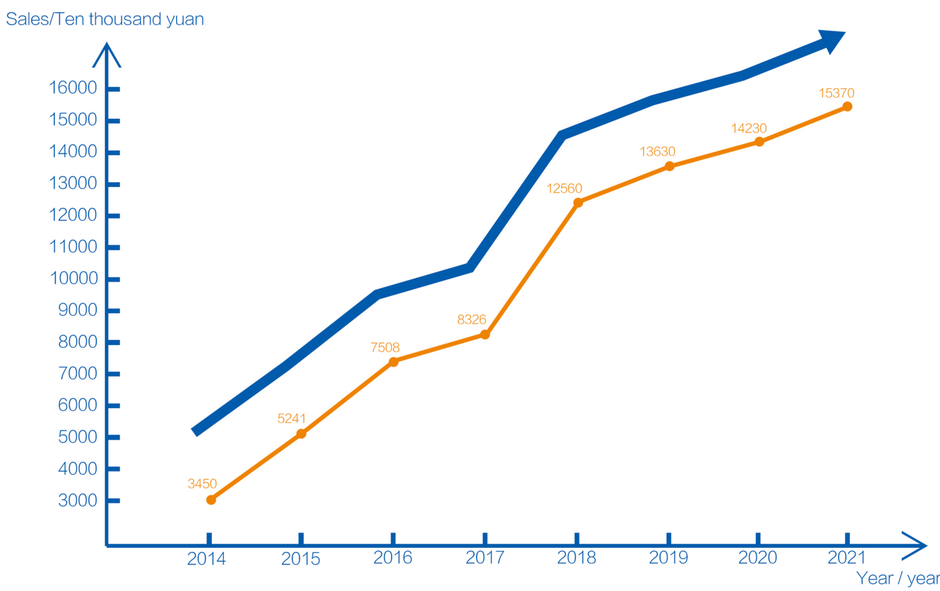

Uganda water tank

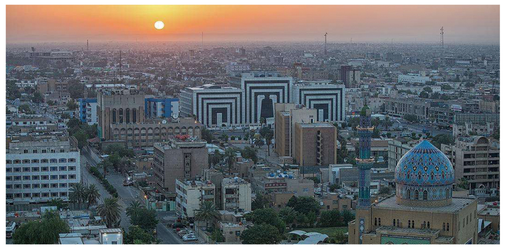

Iraq water tank

Pakistan mutiyari project

Maldives stainless steel plate

Some living water supply cases

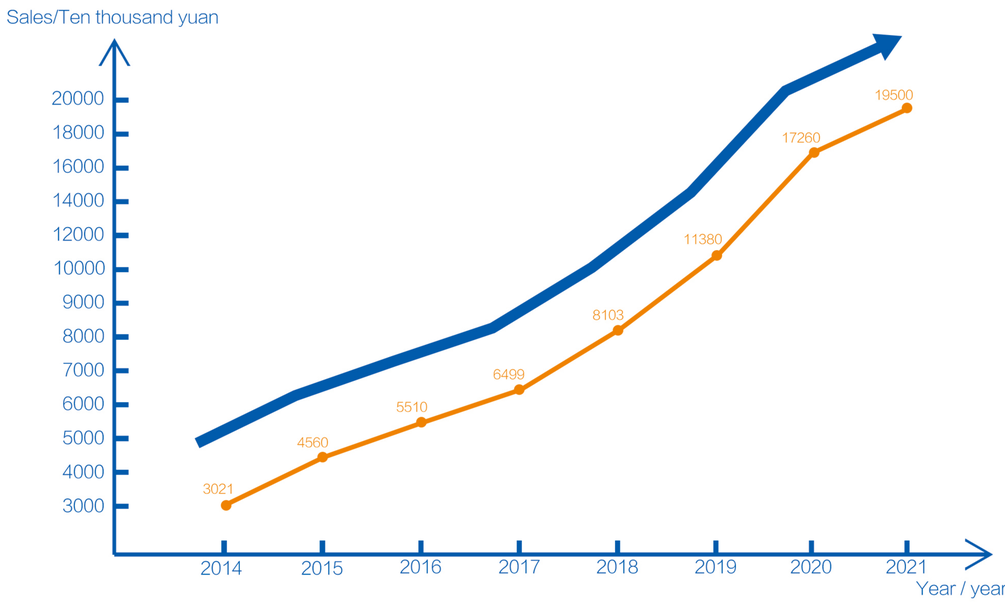

Domestic water for housing in Nigeria

Vietnam Nguyen Trung Kien water tank

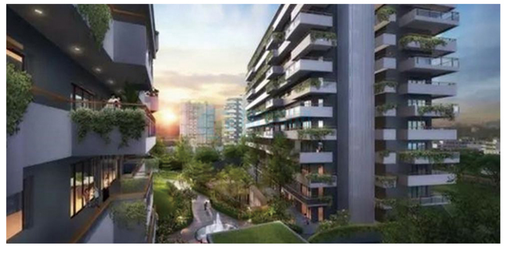

Cambodia housing construction project

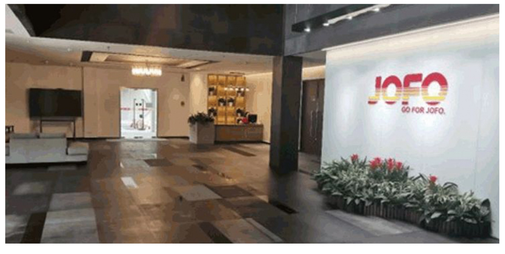

JOFO (Thailand) nonwovens Co., Ltd

Industry application

IT IS APPLICABLE TO ALL KINDS OF FIRE / DOMESTIC WATER SUPPLY SYSTEMS FOR INDUSTRIAL AND CIVIL CONSTRUCTION PROJECTS (SUCH AS FACTORIES, WAREHOUSES, STORAGE TANKS, STATIONS, AIRPORTS, HOSPITALS, OFFICES, BUSINESSES, GARAGES, EXHIBITION BUILDINGS, CULTURAL AND SPORTS BUILDINGS, NURSING HOMES, RESIDENCES, ENTERTAINMENT PLACES, URBAN COMPLEXES, ETC.).

Factory

Office building

Culture and sports architecture

Exhibition Building

Bank

Power generation

Station

Airport

Theater

Warehouse

After-sales service

MINGXING WATER SUPPLY

One year warranty of materials except for installation problems

Within 12 months from the date of delivery, if there is any quality problem in the product materials during the warranty period, it shall bear the responsibility of free replacement. If the quality problem occurs due to installation problems, it is not within the scope of quality assurance.

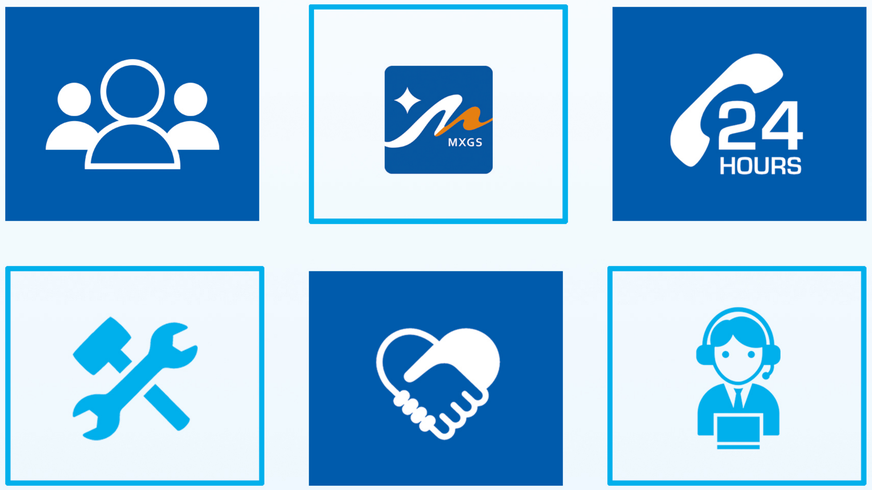

TWELVE STAR SERVICE CERTIFICATION

★★★★★★★★★★★★

+86 0515 80663333